USER MANUAL

THERMOSTAT GLO76 WIFI

Thank you for purchasing a thermostat GLO76. The GLO76 WiFi thermostat is an intuitive programmable thermostat with the LCD screen and WiFi control. Install applications on your smartphone to remotely control the heating system using WiFi. The new thermostat will deliver an even and comfortable temperature in every room of your property. We combine technology, craftsmanship and the best quality materials to deliver you safe and reliable product, combined with a sleek, modern appearance. Please read this user manual to learn how to install and use the thermostat. Please make sure the thermostat is installed by a competent and authorized person, that will follow all instructions.

YOUR HOME- SMART HOME

The offered thermostat works with the Smart Life application, with the possibility of voice control using Google Home or Amazon Alexa.

With the ability to configure scenarios from the application level using other devices compatible with the Smart Life application.

CHARACTERISTICS

Appearance

1. Negative screen (Black and white colours)
2. 51mm round screen.
3. Glass or acrylic lens for your choice.
4. Touch buttons for easy use.
5. The amazing silver frame.
6. The visible thickness on the wall is only 11mm.
7. Swivel connection makes installation easy.
8. 86mm concealed box and European 60mm round can are appropriate for it.
9. White, black or gold casing.

Action

1. Effective functions like BACnet/MODbus/WiFi etc are available.
2. 0.5°C precision keeps the set temperature even
3. °C & °F selectable.
4. Memorization of programs even during a power outage.

INSTALLATION

The thermostat is suitable for installation in a standard 86mm junction box or in a 60mm European tin.

Step 1. Operate with the power off. (Fig 1)

Step 2. Remove the mounting plate by turning the display. (Fig 2)

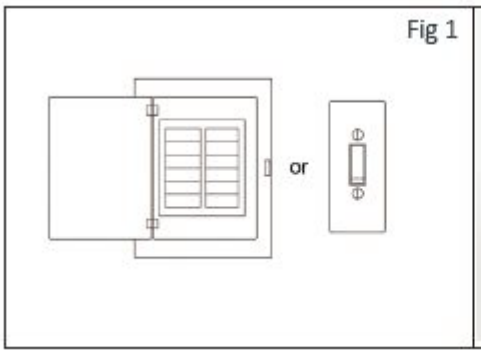

Step 3. Connect the power supply and load to the correct ones terminals (see “CONNECTION” and Fig 3).

Step 4. Fix the mounting plate to the wall with screws you will find in the package. (Fig 4)

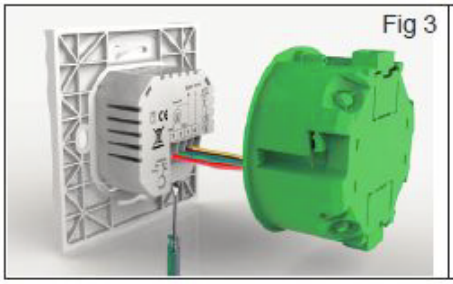

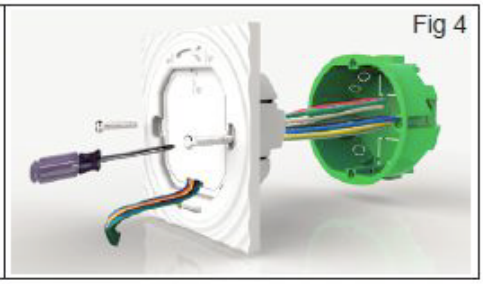

Step 5. Fix the thermostat and mounting plate to the wall turning the thermostat (Fig 5)

Step 6. Installation complete (Fig 6)

POWER OFF

With the power off, touch M for 5 seconds to enter system settings. Touch M to view all possible functions and use the arrows to change the settings.

Any changes are saved automatically.

TECHNICAL DATA

SensorNTC

Accuracy: ±1°C

Power consumption: < 1.5W

Timing Error: <1%

Power supply: 95 ~ 240VAC, 50 ~ 60Hz

Load: 3A (water heating),

16A (electric heating)

Shell material ： PC+ABS (flame retardant)

Dimensions: 86mm x 86mm x 13.3mm

temp. Ambient: 0-45°C, 5-95%RH

temp. Storage: -5-55 °C

Installation hole distance: 60mm

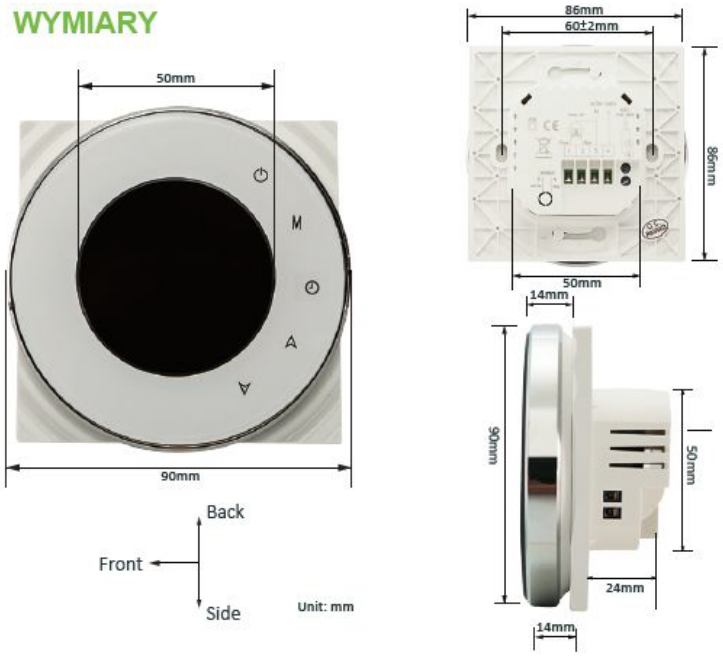

SERVICE

The thermostat has an 18-month warranty from the date of purchase.

Service outside the warranty period may require additional services cost.